



0910 ASL 412

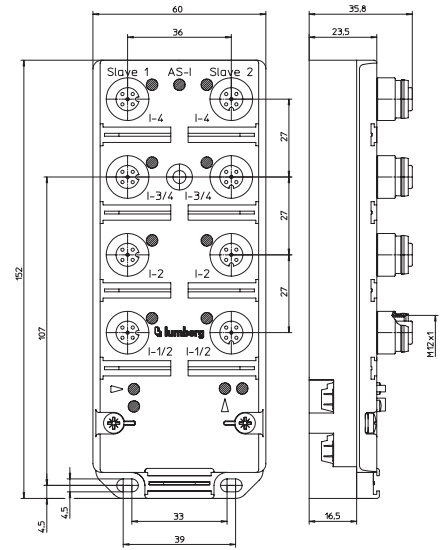


## AS-Interface Module with 8-Digital Inputs

### 8 IN

AS-Interface flat cable module with 8 digital inputs to connect standard sensors, combined M12 socket, infrared interface for the addressing.

- Version 2.1 -







### Bit Assignment

Bit	-	-	-	-	3	2	1	0
	M12 Input							
Byte 0 / Slave 1	-	-	-	-	I-4	I-3	I-2	I-1
Byte 1 / Slave 2	-	-	-	-	I-4	I-3	I-2	I-1

### Diagnostic Indication

LED	Indication	Condition
I-1..4	yellow	channel status
U-AS-i	green	AS-Interface power supply active
	red	communication error
FID	red flashing	periphery error (sensor/actuator short circuit)

### Pin Assignments

Input 1 M12	Input 2 M12	Input 3 M12	Input 4 M12
 <ul style="list-style-type: none"> <li>1 = +24 V</li> <li>2 = IN 2</li> <li>3 = GND (0 V)</li> <li>4 = IN 1</li> <li>5 = earth</li> </ul>	 <ul style="list-style-type: none"> <li>1 = +24 V</li> <li>2 = n.c.</li> <li>3 = GND (0 V)</li> <li>4 = IN 2</li> <li>5 = earth</li> </ul>	 <ul style="list-style-type: none"> <li>1 = +24 V</li> <li>2 = IN 4</li> <li>3 = GND (0 V)</li> <li>4 = IN 3</li> <li>5 = earth</li> </ul>	 <ul style="list-style-type: none"> <li>1 = +24 V</li> <li>2 = n.c.</li> <li>3 = GND (0 V)</li> <li>4 = IN 4</li> <li>5 = earth</li> </ul>

The connection to earth for the inputs is implemented via the earthing contacts at the fastening holes.



## AS-Interface Module with 8-Digital Inputs

0910 ASL 412

### Technical Data

#### Environmental

Degree of protection	IP 67
Operating temperature range	-25°C (-13°F) to +80°C (+176°F)
Weight	300 g
Housing material	PUR

#### Bus system

AS-Interface profile	S 0.A.E
I/O configuration	0 hex
ID code	1 hex
ID2 code (extended ID-code)	E hex
Support A/B addressing	yes

#### Electronics power supply

Rated voltage	AS-Interface net
Voltage range	26.5–31.6 V DC
Power consumption	max. 500 mA
Reverse polarity protection	yes
Indication	LED green

#### Input power supply

Voltage range (AS-Interface net)	17–30 V
Total current of all sensors	max. 200 mA
Short circuit-proof	yes

#### Inputs

Rated input voltage	24 V DC
Signal state "1"	Us > 11 V / Is > 6 mA
Signal state "0"	Is < 2 mA
Input circuit	p-switching
Number of digital channels	8
Channel status indicator	LED yellow per channel

#### Diagnostic

Indication	LED red
------------	---------

#### Included in delivery / Accessories

Dust covers M12	2 pieces
Attachable label	10 pieces

#### Note

The input channels are connected together. That allows a greater connection flexibility (see pin assignment). In case of connection of a two-channel sensor to input socket 1 or 3 a further sensor must not be plugged to input socket 2 or 4 respectively due to the Y wiring of the inputs.

### Part Number

0910 ASL 412



The application of these products in harsh environments should always be checked before use. Specifications subject to alteration.