


LioN-Link I/O Module with 4 Analog Inputs

0942 UEM 630



4 IN

LioN-Link I/O module with 4 analog inputs 0(4)-20 mA to connect standard sensors, M12 sockets (4x), 5 poles

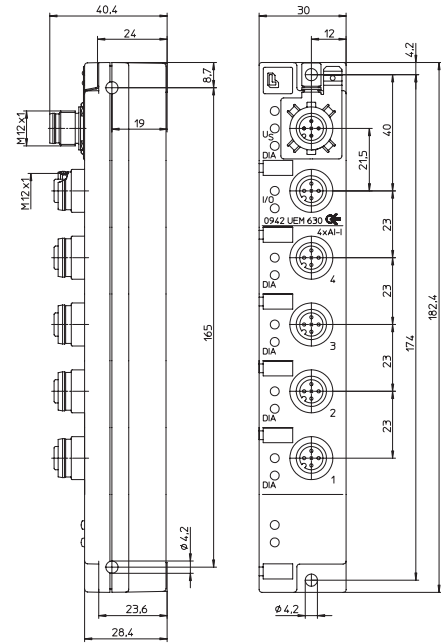



Bit Assignment


Bit	7	6	5	4	3	2	1	0
	M12 Input							
Byte 0								
Byte 1	Channel 1							
Byte 2								
Byte 3	Channel 2							
Byte 4								
Byte 5	Channel 3							
Byte 6								
Byte 7	Channel 4							

Diagnostic Indication

LED	Indication	Condition
1...4	yellow	channel status
1...4 DIA	red	periphery fault
I/O	red red flashing green	wrong configuration / module exchanged not recognized by the BusHead online, communication with BusHead
Us	green	sensor/system power supply
DIA	red	common indication for periphery faults

Pin Assignment

Bus connection M12	Sensor connection M12
 <p>1 = Drain 2 = +24 V 3 = GND (0 V) 4 = Data + 5 = Data -</p>	 <p>1 = +24 V 2 = Signal + 3 = GND (0 V) 4 = GND (0 V) 5 = Earth</p>



LioN-Link I/O Module with 4 Analog Inputs

0942 UEM 630

Technical Data

Environmental

Degree of protection IP 67
 Operating temperature range -10°C (+14°F) to +60°C (+140°F)

Mechanical

Weight 200 g
 Housing material PBT

Input power supply

Us
 Voltage range 24 V DC
 Sensor current 700 mA/module
 Short circuit proof yes
 Power consumption system: typ. 50 mA

Input wiring

Measurement signal (0)4–20 mA
 Resolution 12 bit + sign
 Measuring fault (full measuring range) ±1.2%
 Temperature fault (full measuring range) ±0.01%/K
 Output formats Siemens S7
 Input impedance ≤400 Ω
 Conversion time typ. 25 ms per channel
 Potential separation channel/channel no
 Potential separation power/channel no
 Number of analog channels max. 4
 Channel status indicator LED yellow: channel active

Module diagnostic

Indication Module status Sensor short circuit
 LED red/green (I/O)

Channel diagnostic

0–20 mA Overload at current measurement
 4–20 mA Overload at current measurement/Underflow/Broken wire
 Indication LED red (DIA)

GSD configuration

Module way Resolution 12 bit, 10 bit (Conversion time ≤3 ms/module)
 Channel way Measuring range 0–20 mA or 4–20 mA
 Broken wire (only 4–20 mA), Channel on/off, Diagnostic on /off

Included in delivery/accessories

Dust covers M12, attachable labels

Part Number

0942 UEM 630



The application of these products in harsh environments should always be checked before use. Specifications subject to alteration.