




LioN-Link I/O Module with 8 Digital Inputs

0942 UEM 651



8 IN

LioN-Link I/O module with 8 digital inputs to connect standard sensors, M8 sockets (8 x), 3 poles

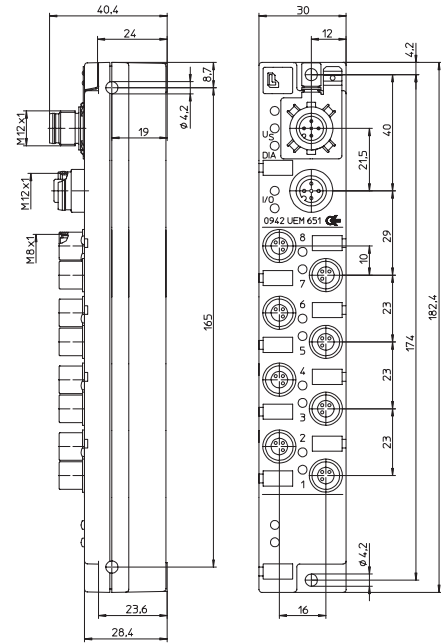




Bit Assignment

Bit	7	6	5	4	3	2	1	0
	M8 Input							
Byte 0	8	7	6	5	4	3	2	1

Diagnostic Indication

LED	Indication	Condition
1...8	yellow	channel status
1...8	red	periphery fault
I/O	red red flashing green	wrong configuration / module exchanged not recognized by the BusHead online, communication with BusHead
Us	green	sensor/system power supply
DIA	red	common indication for periphery faults

Pin Assignment

Bus connection M12	Actuator/sensor connection M8
 <ul style="list-style-type: none"> 1 = Drain 2 = 24 V Sensor/System 3 = 0 V Sensor/System 4 = Data + 5 = Data - 	 <ul style="list-style-type: none"> 1 = +24 V 3 = 0 V 4 = In /Out
	



LioN-Link I/O Module with 8 Digital Inputs

0942 UEM 651

Technical Data

Environmental

Degree of protection IP 67
Operating temperature range -10°C (+14°F) to +60°C (+140°F)

Mechanical

Weight 175 g
Housing material PBT

System/sensors

power supply Us
Rated voltage 24 V DC
Voltage range 19–30 V DC
Power consumption typ. 70 mA
Operating indication LED green

Input power supply

Us
Voltage range min. (U_{System} – 1.5 V)
Sensor current 700 mA/module
Short circuit proof yes
Indication LED green

Input wiring

Type 3 acc. to IEC 61131-2
Rated input voltage 24 V DC
Channel type N.O. p-switching
Number of digital channels max. 8
Channel status indicator LED yellow per channel
Diagnostic indication LED red per channel

Included in

delivery/accessories Dust covers M12, attachable labels

Diagnostic

Periphery fault diagnosis for sensor short circuit, sensor low voltage detection

Part Number

0942 UEM 651



The application of these products in harsh environments should always be checked before use.
Specifications subject to alteration.