


BS-W-12 Conector

- Carcasa plástica
- Rosca metálica
- Bornes
- Elevado grado de protección
- Salida de cable 4 x 90° giratorio




CE

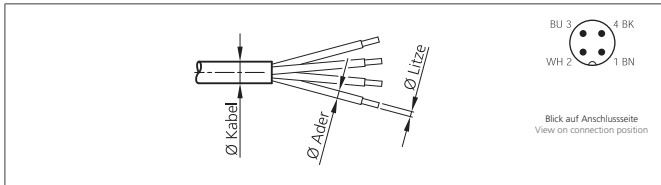

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

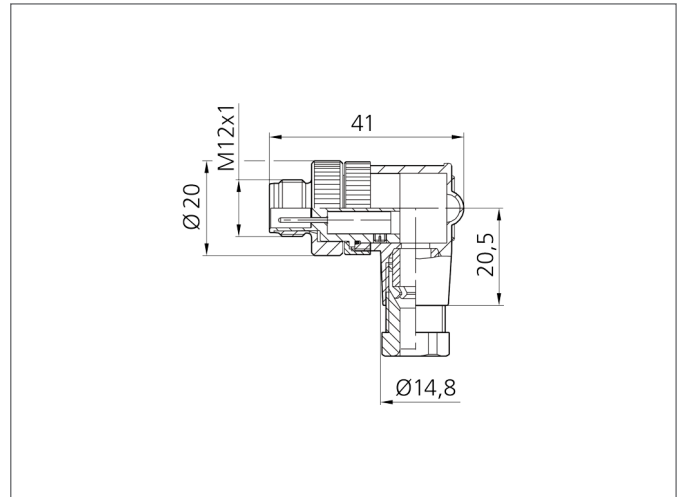

TECHNICAL INFORMATION (typ.)

+20°C, 24V DC

Diseño	angular
Técnica de protección	IP 67
material de la carcasa	Plásticos
Connection sensor side	Field-wireable, Bornes, 4-polos
Connection control side	Connector, M12x1, 4-polos
Para diámetro de cable	4,0 ... 6,0 mm
Para trenzas	0,75 mm ²