



Field-wireable connector , M12x1, Insulation displacement contact

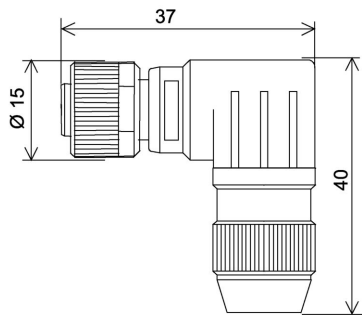


Product data

Item description	WWAKC4S
Item-No.	8019719
Customs tariff-No.	85366990
Step-File	WWAKC4S.stp
EAN	4047106055950

Technical data

Connector	female, angled, M12x1
Number of pins	4
Coding	A
Rated voltage	32V
Current load (at 40°C)	4A
Insulation resistance	$\geq 10^9 \Omega$
Resistance	$\leq 10 \text{ m}\Omega$
Ambient temperature product	-40°C...+85°C
Grip body material	Plastic, PA, BK
Connecting cross-section	max. 0.5 mm ²
Cable outlet	4...5,1 mm
Connecting type	Insulation displacement contact
Standards	IEC 61076-2-101
Degree of protection (mounted)	IP67
Mechanical life-cycle	>100 mating cycles
Degree of pollution	3

Manual

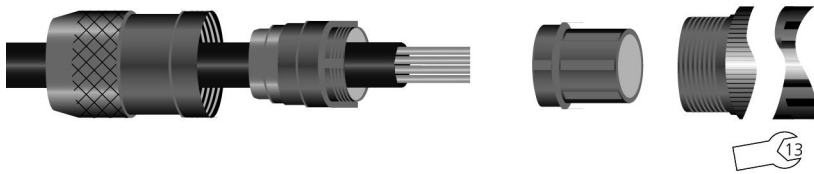

Classification

eCl@ss 6.0	27260702
eCl@ss 7.0	27440102
eCl@ss 8.0	27440102
eCl@ss 9.0	27440102
ETIM 5.0	EC002635
ETIM 6.0	EC002635