


Field-wireable connector , M8x1, Insulation displacement contact

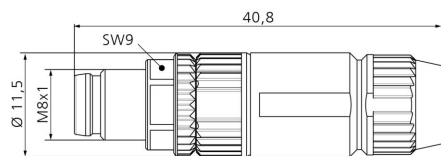


Product data

Item description	SSPC4S
Item-No.	8019722
Customs tariff-No.	85366990
Step-File	SSPC4S.stp
EAN	4047106055929

Technical data

Connector	male, straight, M8x1
Number of pins	4
Rated voltage	32V
Current load (at 40°C)	4A
Insulation resistance	$\geq 10^9 \Omega$
Resistance	$\leq 10 \text{ m}\Omega$
Ambient temperature product	-40°C...+85°C
Contact material	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, PA, BK
Grip body material	Zinc die-cast, nickel-plated
Coupling nut material	Metal, GD-ZN, nickel-plated
Connecting cross-section	0.14...0.34 mm ² AWG26...22
Cable outlet	2,5...5,1 mm
Connecting type	Insulation displacement contact
Standards	IEC 61076-2-104
Degree of protection (mounted)	IP67
Mechanical life-cycle	>100 mating cycles
Degree of pollution	3

Manual

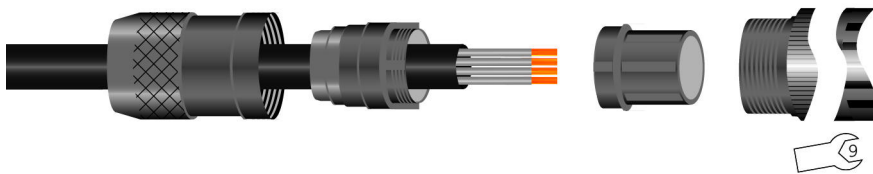

Classification

eCl@ss 6.0	27260702
eCl@ss 7.0	27440102
eCl@ss 8.0	27440102
eCl@ss 9.0	27440102
ETIM 5.0	EC002635
ETIM 6.0	EC002635