


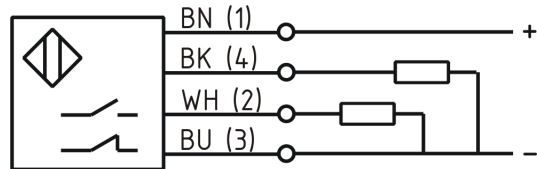


[Article Page](#)

**Product Description** **capacitive sensor DC**

Name	SC30-Q40KB-DPA-V2
Order number	08323403052
Switching distance	30 mm
Mounting	 shielded
Switch type	 Changeover
Signal Type	DC PNP
Connection	 Connector

Connection diagramm



Dimension (in mm)	Q 40 x 40 x 120
-------------------	-----------------

**Technical Specification**

Operating voltage	10 - 30 VDC
Max. ripple	≤ 10 %
Voltage drop	2 V
Max. load current	300 mA
No load current	≤ 10 mA
Leakage current	≤ 10 µA
Switching frequency	100
Switching hysteresis	≤ 15 %
Operating temperature	-25 ° C to 70 ° C
Temperature drift	≤ 10 %
Repeat accuracy	≤ 5 %
Switching state	LED
Digital output	
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Housing material	PBT
Termination	Connector M12 4pol



## SC30-Q40KB-DPA-V2

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

**Errors and omissions exceptet**