



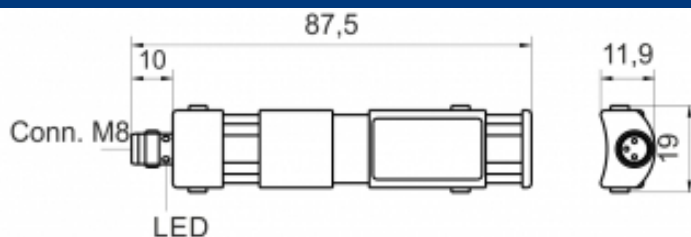


[Article Page](#)

Product Description

inductive tube sensor

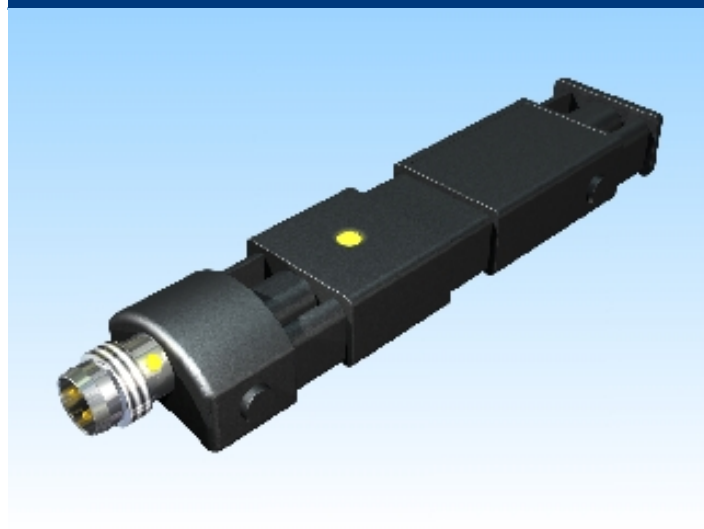

Name	KJ10-Q16KN-DPS-V1
Order number	08310001105
Switching distance	10 mm
Mounting	 non shielded
Switch type	 N.O.
Signal Type	DC PNP
Connection	connector M8
Connection diagramm	

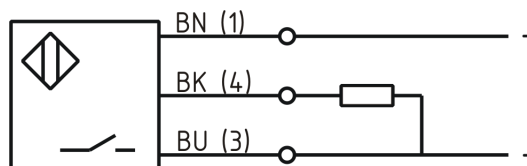

Dimension (in mm)	S 19 x 11 x 87.5
-------------------	------------------

Technical Specification

Special features	Tube sensor with static function for Status detection in plastic hoses
Operating voltage	10 - 30 V DC
Max. ripple	≤ 10 %
Voltage drop	2,4 V
Max. load current	200 mA
No load current	≤ 10 mA
Leakage current	≤ 10 μA
Switching hysteresis	≤ 15 %

Operating temperature	-25 ° C to 70 ° C
Temperature drift	≤ 10 %
Repeat accuracy	≤ 10 %
Swiching state	LED
Digital output	static output function
Time delay	300 ms
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2: 2008
Housing material	Plastic
Utilisation category	DC 13
Termination	Connector M8 3pin

Errors and omissions exceptet