





[Article Page](#)

Product Description **inductive sensor AC**

Name	KJ5-M18MB60-AZÖ
Order number	08317211300
Matchcode	9921-1300
Switching distance	5 mm
Mounting	 shielded
Switch type	 N.C.
Signal Type	AC
Connection	 Cable

Connection diagramm

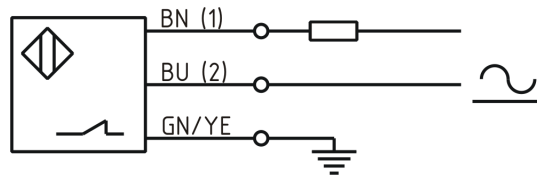

Dimension (in mm)	fine-pitch thread M18 x 60
-------------------	----------------------------

Technical Specification

Operating voltage	20 - 250 VAC
Voltage drop	5 V
Max. load current	300 mA
Leakage current	≤ 2 mA
Switching frequency	15
Switching hysteresis	≤ 15 %
Operating temperature	-25 ° C to 70 ° C
Temperature drift	≤ 10 %
Repeat accuracy	≤ 5 %
Switching state	LED
Digital output	
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Material active face	PCB
Termination	2m PVC 3x0,5mm ²

Errors and omissions exceptet