






[Article Page](#)

Product Description	polarized reflex light barrier
Name	KORP1000-M18MB71-DPU-RT
Order number	08362250255
Matchcode	M18B-L1000P-CX6C4U2-PF
Switch type	  Programmable
Signal Type	DC PNP
Illuminant	 Red light 650 nm
Connection	 Cable

Connection diagramm

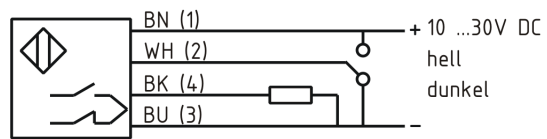

Technical Specification	
Signal type	Polarized retroreflective sensor
Operating voltage	10 - 30 V DC
Max. load current	200 mA
No load current	< 30 mA
Switching frequency	300
Operating temperature	-25 ° C to 55 ° C
Swiching state	LED
Digital output	
Measuring range	1 m
Sensitivity adjustable	ja
Sensing range adjustable	nein
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Termination	2m PVC 4x0,5mm <sup>2</sup>

**Errors and omissions exceptet**