





[Article Page](#)

**Product Description** **one-way light barrier**

Name	KOES22M-Q64KB-DPU-IR
Order number	08363215002
Matchcode	RP64-T022MP-CY6C4U2
Switch type	 Programmable
Signal Type	DC PNP
Illuminant	 Infrared light 880 nm
Connection	 Cable

Connection diagramm

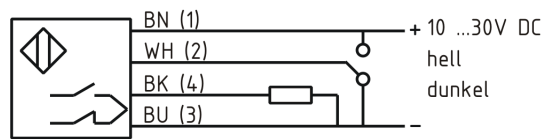

Dimension (in mm)	20 x 60 x 43
-------------------	--------------

**Technical Specification**

Signal type	Throughbeam sensor
Operating voltage	10 - 30 V DC
Max. load current	100 mA
No load current	< 35 mA
Switching frequency	33
Operating temperature	-25 ° C to 55 ° C
Swiching state	LED
Digital output	
Measuring range	22 m
Sensitivity adjustable	ja
Sensing range adjustable	nein
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Housing material	Plastic
Termination	2m PVC 4x0,5mm <sup>2</sup>

**Errors and omissions exceptet**