





[Article Page](#)


**Product Description**

**acoustic sensor**

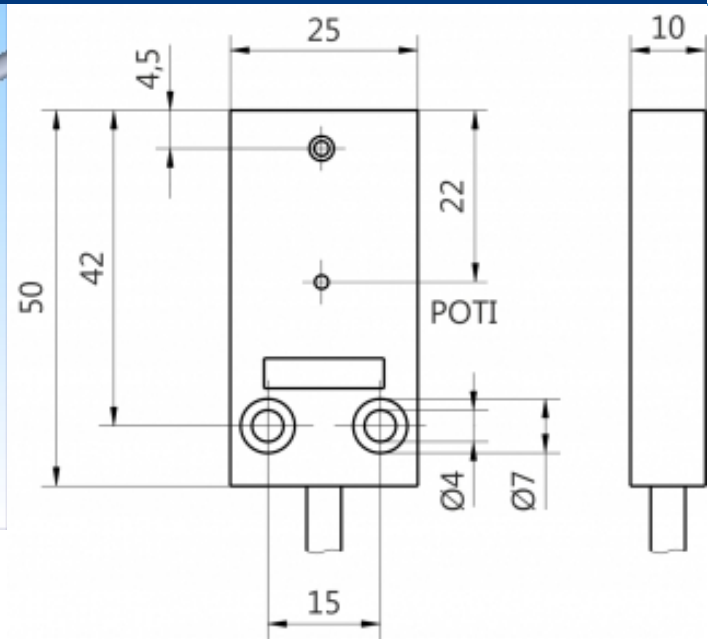

Name	KA1-Q25KB-DPÖ
Order number	08340001010
Mounting	 non shielded
Switch type	 N.C.
Signal Type	DC PNP
Connection	 Cable

Connection diagramm

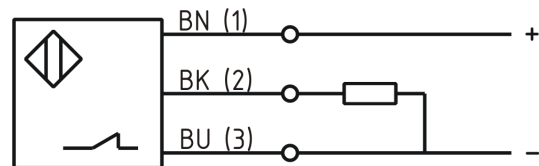

Dimension (in mm)	Q 25 x 10 x 50
art_gewicht	70

**Technical Specification**

Operating voltage	10 - 30 V DC
Max. ripple	≤ 10 %
Voltage drop	1,5 V
No load current	≤ 10 mA
Operating temperature	-25 ° C to 85 ° C
Temperature drift	≤ 10 %
Sensitivity adjustable	ja - Poti

Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP 67
EMC-level	DIN EN 60947-5-2: 2008
Housing material	PA 6.6
Rated operating current at 40° C	16 mA
Rated operating voltage	24 V DC
Cable length	2 m
Utilisation category	DC 13
Cable material	PVC LIYY grau
Cable cross	3x0.34mm <sup>2</sup>

**Errors and omissions exceptet**