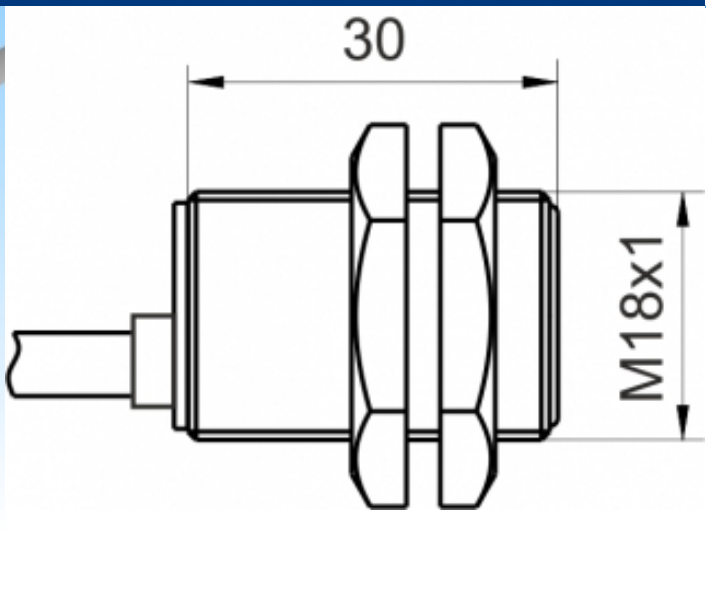




[Article Page](#)

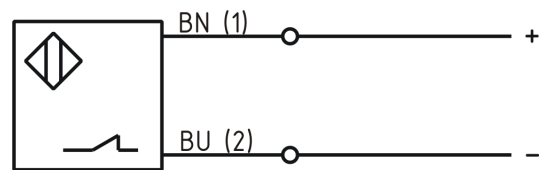
Product Description

inductive sensor NAMUR



| | |
|--------------------|--|
| Name | KJ8-M18KN30-NA |
| Order number | 08317321200 |
| Matchcode | 9932-1200 |
| Switching distance | 8 mm |
| Mounting |  non shielded |
| Signal Type | Namur |
| Connection |  Cable |

Connection diagramm



| | |
|-------------------|----------------------------|
| Dimension (in mm) | fine-pitch thread M18 x 30 |
|-------------------|----------------------------|

Technical Specification

| | |
|-----------------------|-------------------|
| Operating voltage | 6 - 12 V DC |
| Max. ripple | ≤ 5 % |
| No load current | ≤ 3,5 mA |
| Switching frequency | 500 Hz |
| Operating temperature | -25 ° C to 60 ° C |
| Temperature drift | ≤ 10 % |
| Repeat accuracy | ≤ 10 % |
| Time delay | 100 ms |
| Short-circuit proof | yes |
| Overload protection | yes |

| | |
|----------------------------------|--------------------------|
| Reverse voltage protection | yes |
| Protection category | IP67 |
| EMC-level | DIN EN 60947-5-6:2000-12 |
| Housing material | Trogamid |
| Cable length | 2 m |
| Utilisation category | DC 13 |
| Cable material | PVC LIYY blau (blue) |
| Nominal operating voltage | 8,2 V DC |
| Cable cross | 2x0.25 mm ² |
| Load Current OFF | ca. 0,5 mA |
| Load Current ON | ca. 3,5 mA |
| FIT / MTTF acc. to SIEMENS 29500 | 17,40 / 6561y |

Errors and omissions exceptet