



[Article Page](#)

Product Description

inductive sensor DC

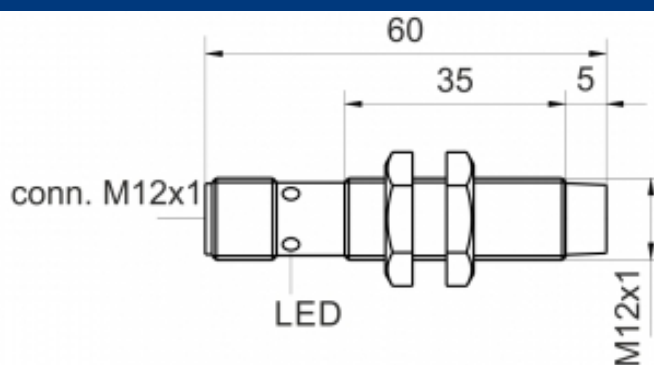

Name	KJ4-M12MN60-DNA-V2
Order number	08310001558
Switching distance	4 mm
Mounting	 non shielded
Switch type	 N.O.
Signal Type	DC NPN
Connection	connector M12
Connection diagramm	

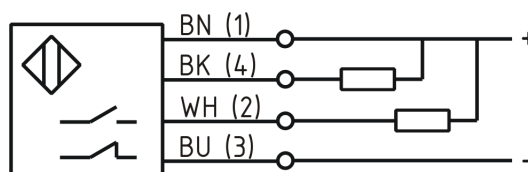

Dimension (in mm)	fine-pitch thread M12 x 60
-------------------	----------------------------

Technical Specification

Operating voltage	10 - 30 VDC
Max. ripple	$\leq 10 \%$
Voltage drop	2,4 V
Max. load current	200 mA
No load current	$\leq 13 \text{ mA}$
Leakage current	$\leq 10 \mu\text{A}$
Switching frequency	1000 Hz
Switching hysteresis	$\leq 15 \%$
Operating temperature	-25 ° C to 70 ° C
Temperature drift	$\leq 10 \%$

Repeat accuracy	≤ 10 %
Switching state	LED
Time delay	100 ms
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2: 2008
Housing material	Brass, nickel plated
Material active face	Pocan KU 2-7503/1 + Batch RAL 9004LS
Utilisation category	DC 13
Contact material	Cu
Contact surface material	NiAu
Contact holder	Makrolon 2405 farblos
Termination	Connector M12 4pin
FIT / MTTF acc. SIEMENS 29500	68,97 / 1655y

Errors and omissions excepted