





[Article Page](#)

Product Description	reflex light barrier
Name	KORS3000-M18MB71-DPU-IR
Order number	08362250219
Matchcode	M18B-L3000P-CX9C4U2
Switch type	 Programmable
Signal Type	DC PNP
Illuminant	 Infrared light 880 nm
Connection	 Cable

Connection diagramm

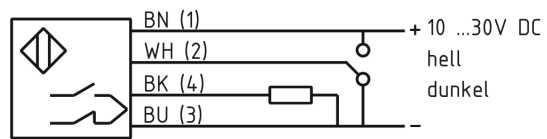

Technical Specification	
Signal type	Retroreflective sensor
Operating voltage	10 - 30 V DC
Max. load current	200 mA
No load current	< 30 mA
Switching frequency	300
Operating temperature	-25 ° C to 55 ° C
Swiching state	LED
Digital output	
Measuring range	3 m
Sensitivity adjustable	ja
Sensing range adjustable	nein
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Termination	2m PVC 4x0,5mm ²

Errors and omissions exceptet