





[Article Page](#)

**Product Description** **polarized reflex light barrier**

Name	KORP1000-M12MB64-DPA-RT
Order number	08362245123
Matchcode	M12B-L1000P-CX6C4U2-PF
Switch type	 Switchable
Signal Type	DC PNP
Illuminant	 Red light 650 nm
Connection	 Cable

Connection diagramm

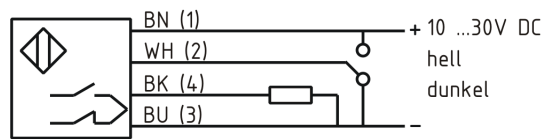

**Technical Specification**

Signal type	Polarized retroreflective sensor
Operating voltage	10 - 30 V DC
Max. load current	150 mA
No load current	< 30 mA
Switching frequency	500
Operating temperature	-25 ° C to 70 ° C
Swiching state	LED
Digital output	
Measuring range	2 m
Sensitivity adjustable	ja
Sensing range adjustable	nein
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Termination	2m PVC 4x0,14mm <sup>2</sup>

**Errors and omissions exceptet**