





[Article Page](#)


**Product Description**

**inductive sensor DC**

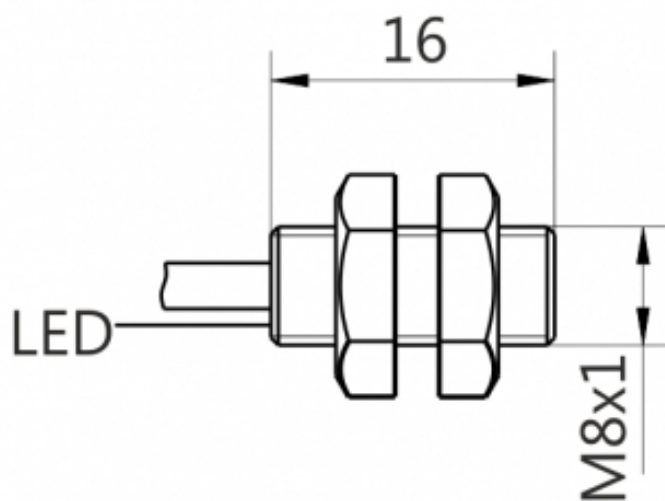

Name	KJ1,5-M8EB16-DPS
Order number	08313080151
Switching distance	1,5 mm
Mounting	 shielded
Switch type	 N.O.
Signal Type	DC PNP
Connection	 Cable

Connection diagramm

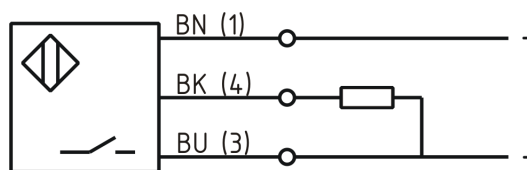

Dimension (in mm)	fine-pitch thread M8x1 x 16
-------------------	-----------------------------

**Technical Specification**

Operating voltage	10 - 30 VDC
Max. ripple	≤ 10 %
Voltage drop	2,4 V
Max. load current	200 mA
No load current	≤ 10 mA
Leakage current	≤ 10 μA
Switching frequency	2000 Hz
Switching hysteresis	≤ 15 %
Operating temperature	-25 ° C to 70 ° C

Temperature drift	≤ 10 %
Repeat accuracy	≤ 5 %
Swiching state	LED
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Housing material	Stainless steel V2A
Material active face	PBT
Cable length	2 m
Utilisation category	DC 13
Cable material	PVC
Cable cross	3x0,14 mm <sup>2</sup>
Termination	2m PVC 3x0,14mm <sup>2</sup>

**Errors and omissions exceptet**