



Magneto-resistive Sensors with detection of direction of rotation Series 350 • 10 - PNP

Housing M 12 x 1



- Housing material: Stainless steel VA
- Magneto-resistive sensors detect ferromagnetic targets, such as gear wheels, wipers, slitting discs, gear rods, etc.
- Contactless detection of rotary motion, therefore wear-free and maintenance-free operation.
- Measuring range from 0 Hz up to 25 kHz. Ideal for the safe detection of creeping movements as well as fast rotary motions.
- Measuring gear wheel modul size 0.7...4.00
- Width of target gear wheel ≥ 10 mm

Certificate:



Technical data

| | |
|-------------------------------------------|-----------------------------------------|
| Operating sensing distance S_a | < 2 mm (Modul 4), < 1 mm (Modul 1) |
| Electrical version | 4-wire DC |
| Output | Normally open |
| Type NPN | |
| Art.-No. | |
| Connection diagram No. | |
| Type PNP | MRS-350-M12-10-S |
| Art.-No. | 360 900 |
| Connection diagram No. | 2 |
| Operating voltage (U_b) | 10...35 V DC |
| Output current max. (I_e) | 250 mA |
| Voltage drop max. (U_d) | ≤ 2.5 V |
| Permitted residual ripple max. | 10 % |
| No-load current (I_0) | Typ. 15 mA |
| Frequency of operating cycles min. / max. | 0.5 Hz / 25 kHz |
| Permitted ambient temperature | -40...+85 °C / 125 °C* |
| LED-display | Green / yellow |
| Protective circuit | Built-in |
| Degree of protection IEC 60529 | IP 67, IP 69K |
| Norm | EN 60947-5-2 |
| Connection cable | 2 m, silicone, 4 x 0.14 mm ² |
| Housing material | VA No. 1.4305 |
| Active surface | VA No. 1.4305 |
| Lid | PEEK (FDA 21 CFR 177.2415) |

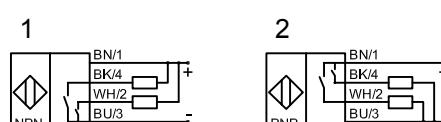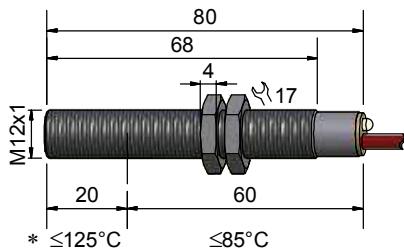

BK = Speed control

WH = detection of direction of rotation

Made in Germany

All specifications are subject to change without notice. (03/2014)