



Capacitive evaluation units Series KSA-80 - PNP



Housing 50 x 50 x 25 mm

- For capacitive sensors KS-250-M18/...
- Hysteresis adjustable



Technical data

Electrical version	3-wire DC
Output function	Normally closed
Type PNP	KSA-80-BB-Ö-50x50x25-PA-Z02/Y26-1
Art.-No.	563 700
Operating voltage (U_B)	10...35 V DC
Voltage drop max. (U_d)	≤ 2.5 V
Permitted residual ripple max.	10 %
Operating current max. (I_o)	400 mA
No-load current (I_o)	Typ. 10 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable	2 m PVC, 3 x 0.14 mm ²
Housing material	PA

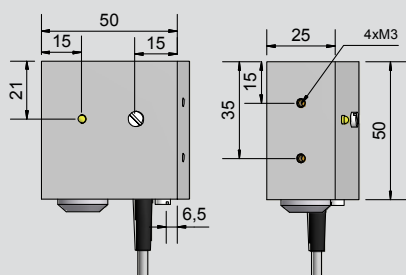

Made in Germany