



TRUE L&V&L Capacitive Evaluation Unit Analogue current output 4...20 mA


- For capacitive level probes with analogue measuring range KFS-1-...-Y75
- Operating voltage 18...36 V DC
- Potential-free change over contact as signal output
- For materials with ϵ_r 1,2...30



Technical data

Output function	Analogue
Type Analogue	KFA-1-1000-XXL-IL4-Y70
Art.- No.	AF 0131
Operating voltage (U_B)	18...36 V DC
Permitted residual ripple max.	25 %
Analogue output	4...20 mA
Load resistance (R_L)	$\leq 600 \Omega$
Power consumption (outputs no-load)	Typ. 3 W
Permitted ambient temperature	-25...+55 °C
LED-Display	Green / U_B standby
LED-Display	Green-yellow / filling level
Protective circuit	Built-in
Degree of protection IEC 60529	IP 54
Norm	EN 60947-5-2*
Connection	Sockets
Housing material	ABS

All specifications are subject to change without notice. (18.02.2020)

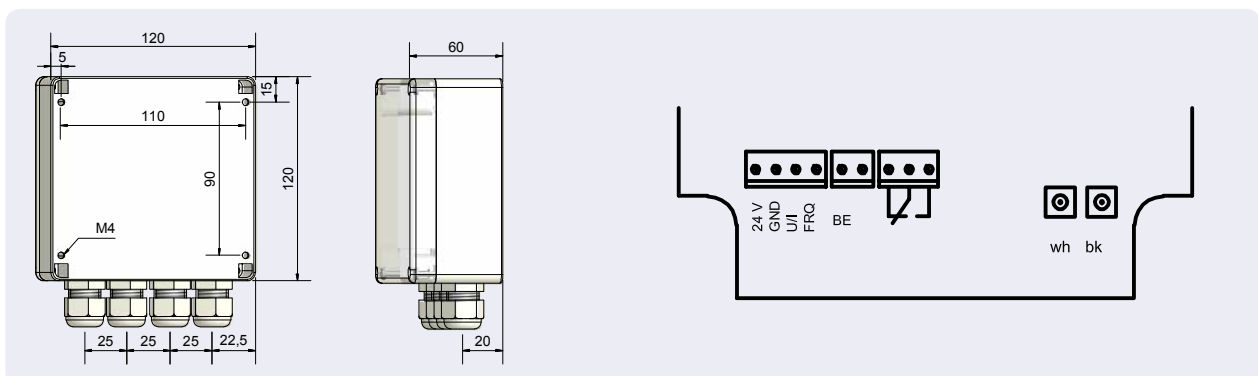

*Where applicable

Made in Germany