



Power Supply EG I-130-MM Series 130 - Relay Output- MIN / MAX-Control

- To connect two 2 or 3-wire sensors in NO-function with NPN or PNP transistor output. When connecting antivalent sensors the NO-output can be connected.
- Integrated MIN / MAX-Control
- With one output relay (1 x changeover)



Certificate:



Technical data

Operating voltage (U_B)	115 / 230 V AC $\pm 15\%$ 40...60 Hz
No-load current (I_o)	Typ. 20 mA
Output function	1 x potential-free change-over contact
Contact rating each relay max.	250 V AC / 6 A
Type	EGI-130-MM
Art.-No.	522 200
Actuating voltage (U_S)	24 V DC $\pm 20\%$
Actuating current max. (I_S)	60 mA
Residual ripple acc. to DIN 41 755 max.	2 %
Actuating signal	PNP or NPN
Permitted ambient temperature	-25...+80 °C
Display	LED green and yellow
Version	Min. / max.-Control
Degree of protection IEC 60529	Housing: IP 30 Connections: IP 20
Norm	EN 60 947-5-2
Connection	Screw terminals

All specifications are subject to change without notice. (20.02.2019)

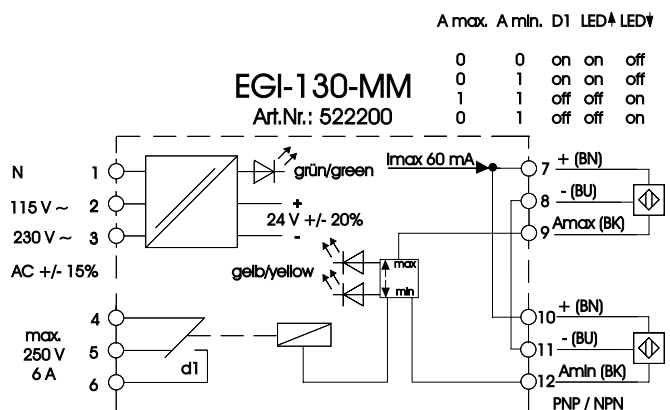

Made in Germany