


Inductive Proximity Sensors (AC Cylindric/rectangular Sizes)

IBCT3038

M30 (AC NO)

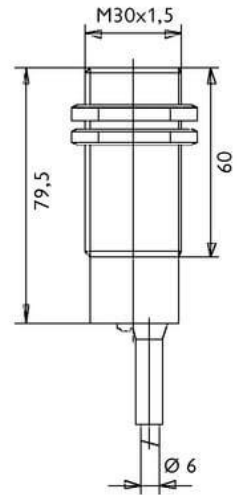

Connection:	2 m PVC/3 x AWG20
Connection type:	cable
Outlet:	AC NO
Design:	M30
Diameter:	M30x1,5
Installation type:	flush
Length:	60 mm
LED:	yes
No-load current:	2 mA
Reproducibility:	0,01 mm
Switching distance:	10 mm
Switching frequency:	15 Hz
Switching hysteresis:	15 %
Protection class:	IP 67
Voltage drop:	5 V
Voltage type:	VAC
Voltage range:	20 - 250 V
Ampacity:	500 mA
Temperature drift:	10 °C
Environment temperature:	-25 bis 70 °C
Material:	nickel plated brass

Further information about this product can be found on our website, please visit:

https://schoenbuch-sensor.de/en/products/ibct3038_en/