


Inductive Proximity Sensors (DC Cylindric Sizes)

IB22CT3015*

M30 (PNP NC)

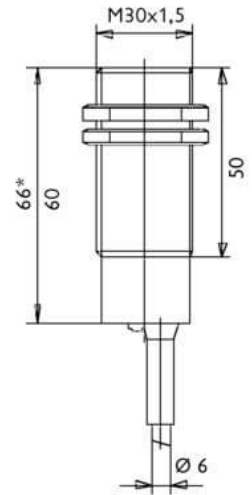

| | |
|--------------------------|---------------------------------|
| Connection: | 2 m PVC/3 x 0,5 mm ² |
| Connection type: | cable |
| Outlet: | PNP NC |
| Design: | M30 |
| Diameter: | M30x1,5 |
| Installation type: | flush |
| Short protection: | yes |
| Length: | 66 mm |
| LED: | yes |
| No-load current: | 10 mA |
| Nominal voltage: | 24 VDC |
| Reproducibility: | 1 % |
| Switching distance: | 22 mm |
| Switching frequency: | 300 Hz |
| Switching hysteresis: | 15 % |
| Protection class: | IP 67 |
| Voltage drop: | 2,5 V |
| Voltage type: | VDC |
| Voltage range: | 10 - 30 V |
| Ampacity: | 200 mA |
| Temperature drift: | 10 °C |
| Environment temperature: | -25 bis 70 °C |
| Material: | nickel plated brass |

Further information about this product can be found on our website, please visit:
https://schoenbuch-sensor.de/en/products/ib22ct3014_en/ib22ct3015_en/