


Inductive Proximity Sensors (DC Cylindric Sizes)

IN6DA6512

6,5 cable (NPN NO)

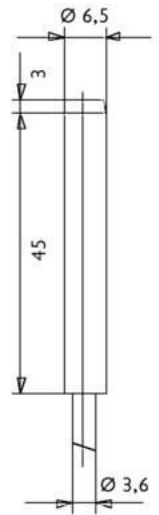

| | |
|--------------------------|----------------------------------|
| Connection: | 2 m PVC/3 x 0,14 mm ² |
| Connection type: | cable |
| Outlet: | NPN NO |
| Design: | 6.5 |
| Diameter: | 6.5 |
| Installation type: | non flush |
| Short protection: | yes |
| Length: | 45 mm |
| LED: | yes |
| No-load current: | 10 mA |
| Nominal voltage: | 24 VDC |
| Reproducibility: | 1 % |
| Switching distance: | 6 mm |
| Switching frequency: | 2000 Hz |
| Switching hysteresis: | 15 % |
| Protection class: | IP 67 |
| Voltage drop: | 2 V |
| Voltage type: | VDC |
| Voltage range: | 10 - 30 V |
| Ampacity: | 200 mA |
| Temperature drift: | 10 °C |
| Environment temperature: | -25 bis 70 °C |
| Material: | nickel plated brass |

Further information about this product can be found on our website, please visit:

https://schoenbuch-sensor.de/en/products/in6da6514_en/in6da6512_en/