


Inductive Proximity Sensors (DC Welding Proof)

# ILCT1814-SF

## M18 (PNP NO)

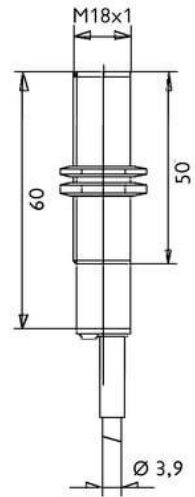

Connection:	2 m PVC/3 x 0,34 mm <sup>2</sup>
Connection type:	cable
Outlet:	PNP NO
Design:	M18
Diameter:	M18x1
Installation type:	flush
Short protection:	yes
Length:	60 mm
LED:	yes
No-load current:	10 mA
Material (active surface):	Teflon
Nominal voltage:	24 VDC
Reproducibility:	1 %
Switching distance:	5 mm
Switching frequency:	1000 Hz
Switching hysteresis:	15 %
Protection class:	IP 67
Voltage drop:	1,5 V
Voltage type:	VDC
Voltage range:	10 - 30 V
Ampacity:	200 mA
Temperature drift:	10 °C
Environment temperature:	-25 bis 70 °C
Material:	brass PTFE-coated

Further information about this product can be found on our website, please visit:

[https://schoenbuch-sensor.de/en/products/ilct1814-sf\\_en/](https://schoenbuch-sensor.de/en/products/ilct1814-sf_en/)