


Inductive Proximity Sensors (DC Cylindric Sizes)

# IK2DA6512

## 6.5 (NPN NO)

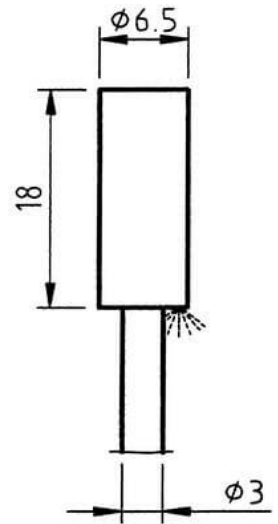

Connection:	2 m PVC/3 x 0,15 mm <sup>2</sup>
Connection type:	cable
Outlet:	NPN NO
Design:	6.5
Diameter:	6.5
Installation type:	flush
Short protection:	yes
Length:	16 mm
LED:	yes
No-load current:	10 mA
Nominal voltage:	24 VDC
Reproducibility:	1 %
Switching distance:	2 mm
Switching frequency:	2000 Hz
Switching hysteresis:	15 %
Protection class:	IP 67
Voltage drop:	2 V
Voltage type:	VDC
Voltage range:	10 - 30 V
Ampacity:	200 mA
Temperature drift:	10 °C
Environment temperature:	-25 bis 70 °C
Material:	stainless steel

Further information about this product can be found on our website, please visit:

[https://schoenbuch-sensor.de/en/products/ik2da6514\\_en/ik2da6512\\_en/](https://schoenbuch-sensor.de/en/products/ik2da6514_en/ik2da6512_en/)