


Inductive Proximity Sensors (DC Cylindric Sizes)

# IN6MD6513\*

**6,5 pluggable (NPN NC)**

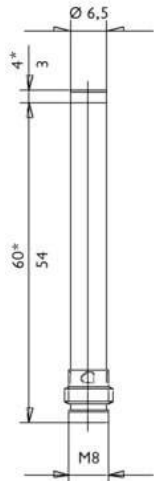

Connection:	plug M8, 3-pin
Connection type:	plug M8
Outlet:	NPN NC
Design:	6.5
Diameter:	6.5
Installation type:	non flush
Short protection:	yes
Length:	60 mm
LED:	yes
No-load current:	10 mA
Nominal voltage:	24 VDC
Reproducibility:	1 %
Switching distance:	6 mm
Switching frequency:	2000 Hz
Switching hysteresis:	15 %
Protection class:	IP 67
Voltage drop:	2 V
Voltage type:	VDC
Voltage range:	10 - 30 V
Ampacity:	200 mA
Temperature drift:	10 °C
Environment temperature:	-25 bis 70 °C
Material:	nickel plated brass

Further information about this product can be found on our website, please visit:  
[https://schoenbuch-sensor.de/en/products/in6md6514\\_en/in6md6513\\_en/](https://schoenbuch-sensor.de/en/products/in6md6514_en/in6md6513_en/)