


Inductive Proximity Sensors (DC Cylindric Sizes)

# ICMD6512

## 6.5 (NPN NO)

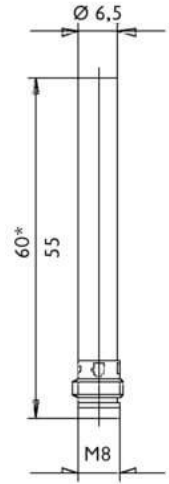

|                          |                     |
|--------------------------|---------------------|
| Connection:              | plug M8, 3-pin      |
| Connection type:         | plug M8             |
| Outlet:                  | NPN NO              |
| Design:                  | 6.5                 |
| Diameter:                | 6.5                 |
| Installation type:       | flush               |
| Short protection:        | yes                 |
| Length:                  | 55 mm               |
| LED:                     | yes                 |
| No-load current:         | 15 mA               |
| Nominal voltage:         | 24 VDC              |
| Reproducibility:         | 1 %                 |
| Switching distance:      | 1,5 mm              |
| Switching frequency:     | 5000 Hz             |
| Switching hysteresis:    | 15 %                |
| Protection class:        | IP 67               |
| Voltage drop:            | 2 V                 |
| Voltage type:            | VDC                 |
| Voltage range:           | 10 - 30 V           |
| Ampacity:                | 200 mA              |
| Temperature drift:       | 10 °C               |
| Environment temperature: | -25 bis 70 °C       |
| Material:                | nickel plated brass |

Further information about this product can be found on our website, please visit:

[https://schoenbuch-sensor.de/en/products/icmd6514\\_en/icmd6512\\_en/](https://schoenbuch-sensor.de/en/products/icmd6514_en/icmd6512_en/)